



THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP. AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.

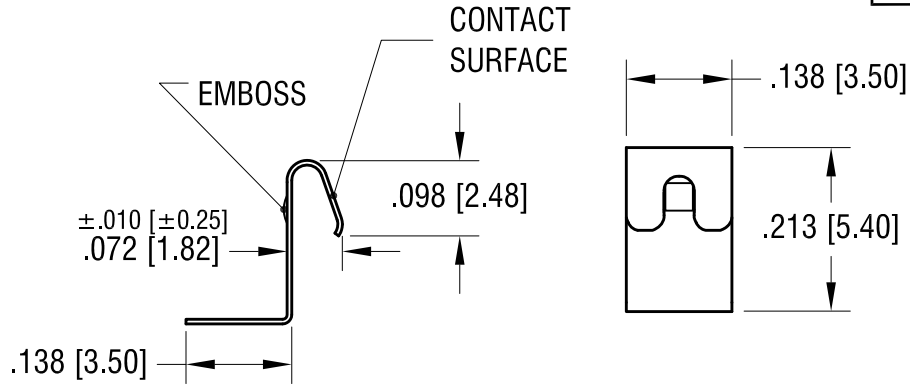

P/N 122

TOLERANCE  $\pm 0.005$  [ $\pm 0.13$ ]

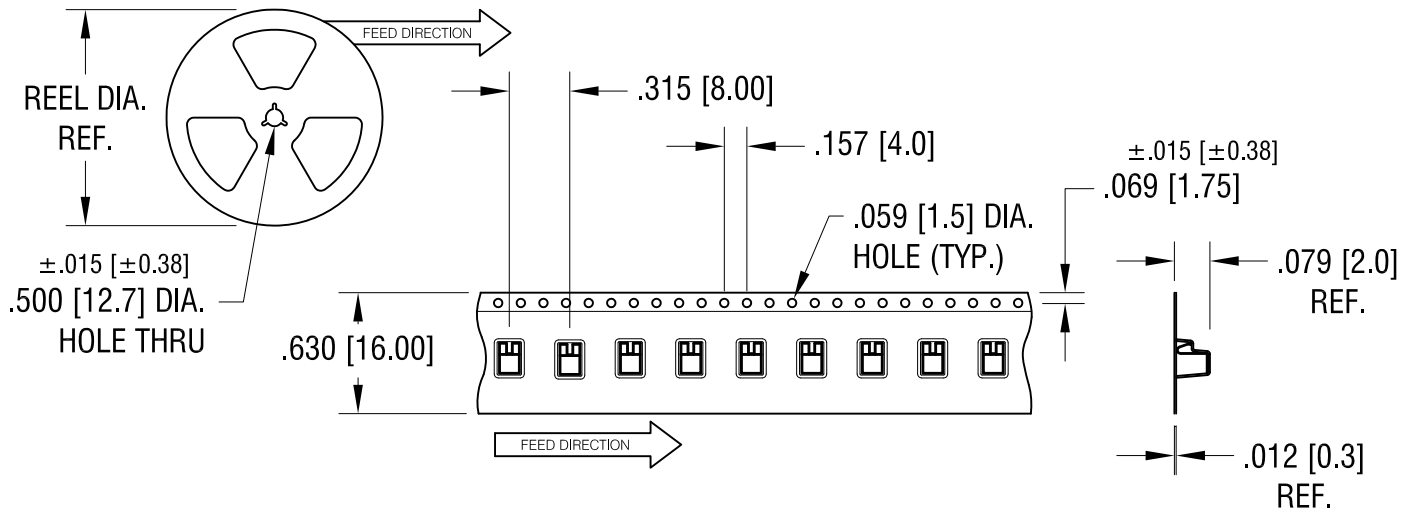

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD

3. REEL:

13.0 [330.0] DIA. 1000 PIECES OF  
P/N 122 PER REEL

CONTRACT SPECIFICATIONS:

1. MAT'L- .006 [0.15] TH'K STAINLESS STEEL  
2. FINISH: GOLD PLATE

12.12.16	CHANGE AS PER ECN 16-101	A
DATE	DESCRIPTION	REV.

<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME POSITIVE CONTACT ON TAPE & REEL			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY NT	DATE 1.06.16
		APP'D LN	SCALE N/A
TOLERANCES DECIMAL ANGULAR	INCH $\pm .010$ [ $\pm 0.25$ ] $\pm 1^\circ$	CODE C	DWG NO. 122TR
UNLESS OTHERWISE SPECIFIED			